

FACTORY SETUP SHEET

A215

DATE

DRIVER

TRACK

TRACK CONDITIONS

☐ Indoor ☐ Tight ☐ Smooth ☐ Hard Packed ☐ Blue Groove
☐ Wet ☐ Low Bite ☐ High Bite ☐ Outdoor ☐ Open ☐ Rough ☐ Loose/Loamy
☐ Dry ☐ Dusty ☐ Wed Bite ☐ Other

ENGINE

Gasket

mm

Plug

Muffler

Fuel

Clutch bell

☐ 16T ☐ 17T ☐ 18T ☐ Other T

Shoes

☐ 3 ☐ 4 Spring mm

DIFF

Front

Oil #

Center

Oil #

Rear

Oil #

T

x

T

Spur gear


T

T


x

T

FRONT SUSPENSION

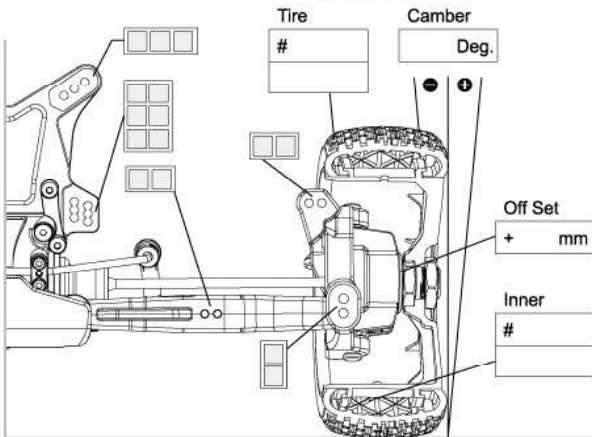


FRONT TOE ANGLE | CASTER ANGLE

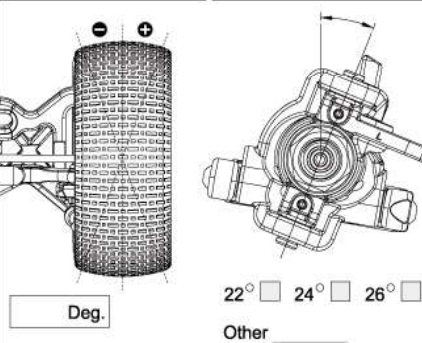

ANTI ROLL BAR

FRONT

#8019 U Type 1.9mm
 #8021 U Type 2.1mm
 #8022 U Type 2.2mm
 #8023 U Type 2.3mm
 #8024 U Type 2.4mm
 #8025 U Type 2.5mm
 others



KICK UP

FF




FR



ANTI SQUAT

TOE ANGLE


RF




RR




REAR SUSPENSION

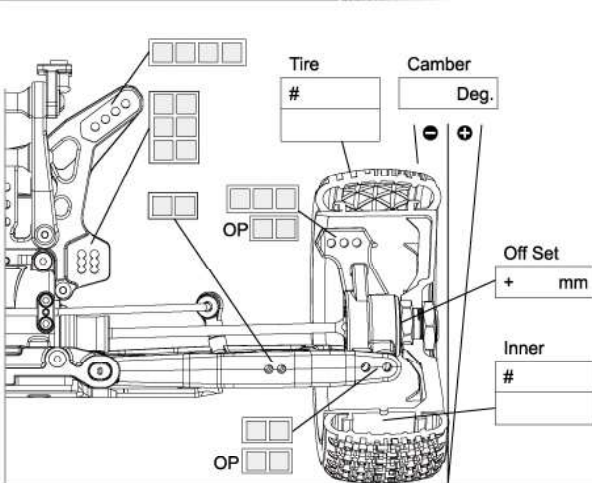

WHEEL BASE

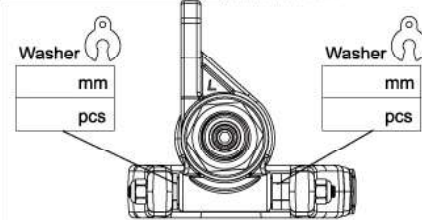


WING POSITION



ANTI ROLL BAR

REAR


#8322 U Type 2.2mm
 #8323 U Type 2.3mm
 #8324 U Type 2.4mm
 #8325 U Type 2.5mm
 #8326 W Type 2.6mm
 #8328 W Type 2.8mm
 #8330 W Type 3.0mm
 others



ACKERMAN



RIDE HEIGHT

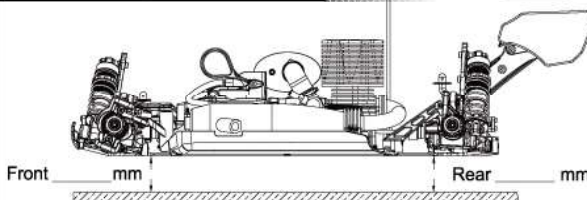

FRONT SHOCK

Oil

#

PISTON


#0096-0615 6x1.5mm
 #0096-0812 8x1.2mm
 #0096-0813 8x1.3mm
 others

CONE OF PISTON

DOWN
 UP

SHOCK SPRINGS

#9680 Black-Red dot
 #9685 Black-Orange dot
 #9690 Black-Yellow dot
 others

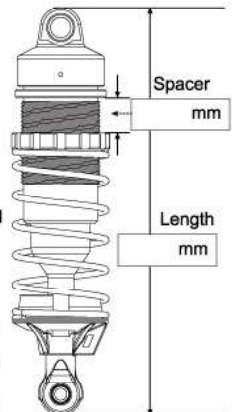

REAR SHOCK

Oil

#

PISTON


#0096-0615 6x1.5mm
 #0096-0812 8x1.2mm
 #0096-0813 8x1.3mm
 others

CONE OF PISTON

DOWN
 UP

SHOCK SPRINGS

#9785 Black-Red dot
 #9790 Black-Orange dot
 #9795 Black-Yellow dot
 others

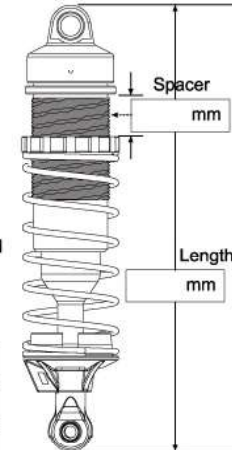

DROOP LIMITER

